

SUBMARINE 9

Eigenschaften

characteristics

Türhöhe door height	max. 2200 mm max. 2200 mm
Türbreite door width	max. 1800 mm max. 1800 mm
Türdicke door thickness	Holz 18-25 mm wood 18-25 mm
Türgewicht door weight	max. 30 kg max. 30 kg
Höhenverstellung height adjustment	± 2 mm ± 2 mm
Dämpfung damping	ohne, einseitig () without, one side ()





SUBMARINE 9




Product Description	≤15kg				01-491-102-115	01-491-102-215	01-491-102-315
	≤30kg	01-491-101-100	01-491-101-200	01-491-101-300	01-491-102-130	01-491-102-230	01-491-102-330
Running / guiding part		4	8	12	4	8	12
Damper		-	-	-	2	4	4
Stopper		2	4	6	-	-	-
ST4.2×16 Cross secess countersunk head self-drilling screw		16	32	48	16	32	48
2mm Allen wrench		1	1	1	1	1	1


TRACKS

Product Description		Material	Finished	Length (mm)	Art.-No.
For variable door thickness	Guiding track	Aluminium anodized	Silver	2500	01-497-250-125
				3500	01-497-250-135
				6000	01-497-250-160
	Running track	Aluminium anodized	Silver	2500	01-496-250-125
				3500	01-496-250-135
				6000	01-496-250-160
For 18mm door thickness	Guiding track with dustcover	Aluminium anodized	Silver	2500	01-497-250-425
				3500	01-497-250-435
				6000	01-497-250-460
	Running track	Aluminium anodized	Silver	2500	01-496-250-425
				3500	01-496-250-435
				6000	01-496-250-460
For 25mm door thickness	Guiding track with dustcover	Aluminium anodized	Silver	2500	01-497-250-525
				3500	01-497-250-535
				6000	01-497-250-560
	Running track	Aluminium anodized	Silver	2500	01-496-250-525
				3500	01-496-250-535
				6000	01-496-250-560

FOR VARIABLE DOOR THICKNESS INSTALLATION PARAMETERS

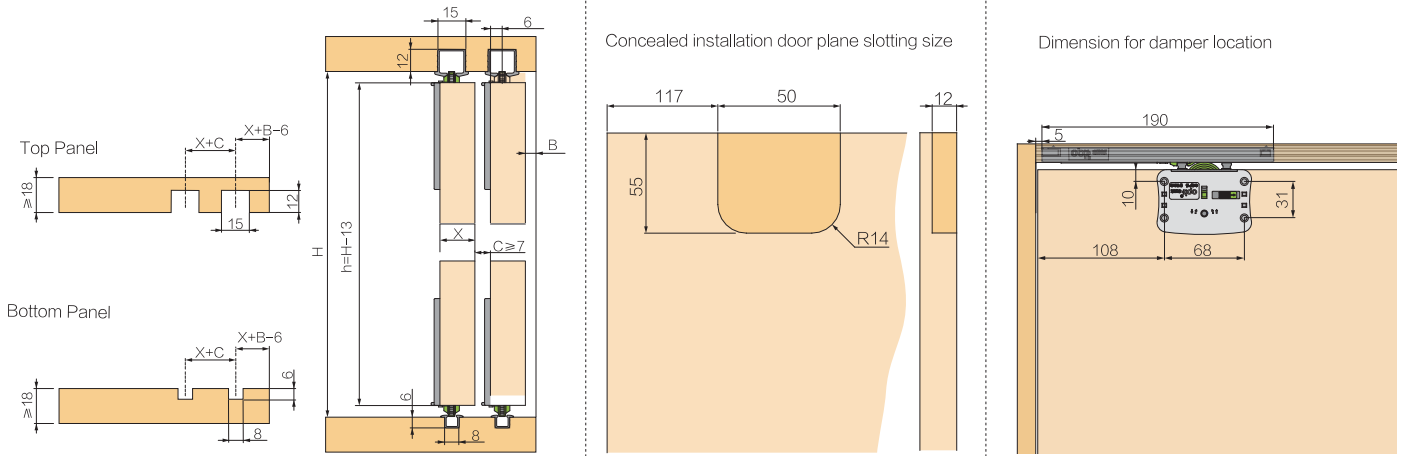

FOR 18MM DOOR THICKNESS INSTALLATION PARAMETERS

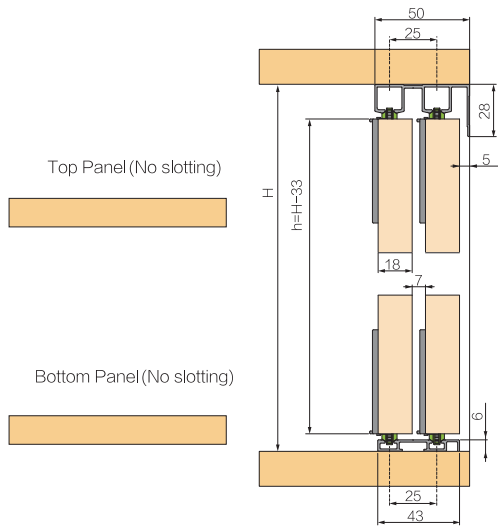

FOR 25MM DOOR THICKNESS INSTALLATION PARAMETERS

